

DIAMOND
Test & Calibration Laboratory STS 0333 / SCS 0101

Product Specification Qualification Test Report



SC APC SM duplex

Index

Measurement / test	Method	Page	Edition ¹⁾	Requalified ²⁾
Insertion loss	IEC 61300-3-4	1	08.'95	-
Return loss	IEC 61300-3-6	2	08.'95	-
Mating durability	IEC 61300-2-2	3	08.'95	-
Change of temperature	IEC 61300-2-22	4	08.'95	-
Cold	IEC 61300-2-17	5	08.'95	-
Dry heat	IEC 61300-2-18	6	08.'95	-
Thermal age	Telcordia GR-326	7	08.'95	-
Damp heat	IEC 61300-2-19	8	08.'95	-
Vibration, sinusoidal	IEC 61300-2-1	9	08.'95	-
Strength of coupling mechanism	IEC 61300-2-6	10	08.'95	-
Cable torsion	IEC 61300-2-5	11	08.'95	-
Impact	IEC 61300-2-12	12	08.'95	-

1) Edition: This column states the date of the Qualification

2) Requalified:: This column states the date of the Requalification

The present Qualification Test Report (QTR) summarizes the qualification measurements and tests performed to verify the design and the optical, mechanical and environmental performance of the SC APC SM duplex connector at the accredited test & calibration laboratory STS 0333 / SCS 0101 at Diamond SA, Losone. This current QTR is a summary of the internal qualification report no. 255 performed at the test & calibration laboratory STS 0333 / SCS 0101 (www.sas.ch).

The qualification test program of the SC APC SM duplex connector is determined under the guideline of IEC 61753-1, which defines the minimum requirements and severities which a single-mode connector must satisfy in order to be considered as meeting category U (uncontrolled environment).

The qualified product is subject to periodic requalification with the purpose of guaranteeing the product compliance to the specifications measured in the present report over the years.

For requalification purposes the principle of similarity is applied, where the qualification data of similar products can be used if they meet the same technology platform and are manufactured using the same process.

For additional information, please contact Diamond or your Diamond Sales Representative.


Insertion loss

Methods: Method B according to IEC 61300-3-4

a) Reference measurement:



b) DUT measurement:



Requirements: $IL_{Max} \leq 0.40$ dB

Samples:

- DUT: 5 SM duplex cable patch cords terminated with Diamond SC APC SM duplex connectors
- Fibre / cable type: Cable with SM 9/125 μ m fibre, Diamond art. no. -
- Reference connectors: 2 Diamond SC APC SM connectors
- Mating adapters: Diamond SC SM duplex

Parameters:


- Wavelengths: 1310 nm / 1550 nm
- No. of measurements: 40

Results:

Statistics	Insertion loss IL against reference connector [dB]	
	at 1310 nm	at 1550 nm
Mean value	0.17	0.19
Standard deviation	0.08	0.08

Return loss

Methods: OLCR method according to IEC 61300-3-6



Requirements: $RL_{Min} \geq 70$ dB

Samples:

- DUT: 5 SM duplex cable patch cords terminated with Diamond SC APC SM duplex connectors
- Fibre / cable type: Cable with SM 9/125 μ m fibre, Diamond art. no. -
- Reference connectors: 2 Diamond SC APC SM connectors
- Mating adapters: Diamond SC SM duplex

Parameters:

- Wavelengths: 1310 nm / 1550 nm
- No. of measurements: 20


Results:

Statistics	Return loss RL against reference connector [dB]	
	at 1310 nm	at 1550 nm
Mean value	-	-
Standard deviation	-	-
Maximum value	-	-
Minimum value	> 80 ¹⁾	> 80 ¹⁾

1) All measured values are beyond the dynamic range of the used instrument.

Mating durability

- Methods:**
- Insertion loss measurement method B according to IEC 61300-3-4
 - Active monitoring of attenuation according to IEC 61300-3-3
 - Mating durability test according to IEC 61300-2-2

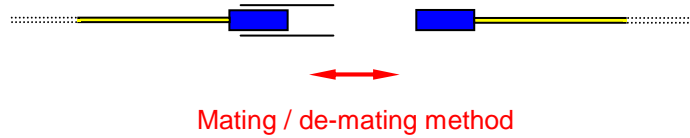

Requirements: $\Delta IL_{Max} \leq 0.20$ dB during test


- Samples:**
- DUT: 2 SM duplex cable patch cords terminated with Diamond SC APC SM duplex connectors
 - Fibre / cable type: Cable with SM 9/125 μ m fibre, Diamond art. no. -
 - Mating adapters: Diamond SC SM duplex

- Parameters:**
- Wavelengths: 1310 nm
 - Monitored channels: 1
 - Mating / de-mating cycles: 1000

Results: Variation of insertion loss during the test: $\Delta IL_{Max} < 0.10$ dB

Change of temperature

- Methods:**
- Insertion loss measurement method B according to IEC 61300-3-4
 - Active monitoring of attenuation according to IEC 61300-3-3
 - Change of temperature test according to IEC 61300-2-22

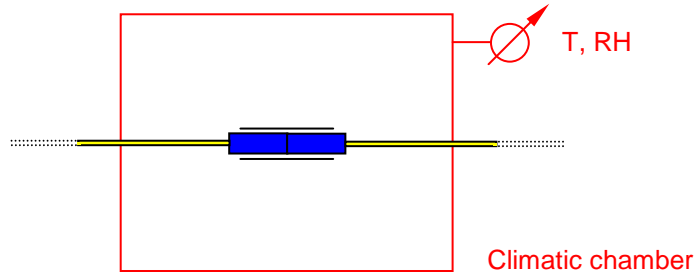

Requirements: $\Delta IL_{Max} \leq 0.20$ dB during test


- Samples:**
- DUT: 1 SM duplex cable patch cords terminated with Diamond SC APC SM duplex connectors
 - Fibre / cable type: Cable with SM 9/125 μ m fibre, Diamond art. no. -
 - Mating adapters: Diamond SC SM duplex

- Parameters:**
- Wavelengths: 1310 nm
 - Monitored channels: 2
 - Upper cycling temperature: +85°C
 - Lower cycling temperature: -40°C
 - Relative humidity: Not controlled
 - Dwell time at extreme temperatures: 30 min
 - Variation of temperature at slopes: 1°C/min
 - Number of cycles: 5
 - Duration: 26 h

Results: Variation of insertion loss during the test: $\Delta IL_{Max} < 0.20$ dB

Cold

- Methods:**
- Insertion loss measurement method B according to IEC 61300-3-4
 - Active monitoring of attenuation according to IEC 61300-3-3
 - Cold test according to IEC 61300-2-17

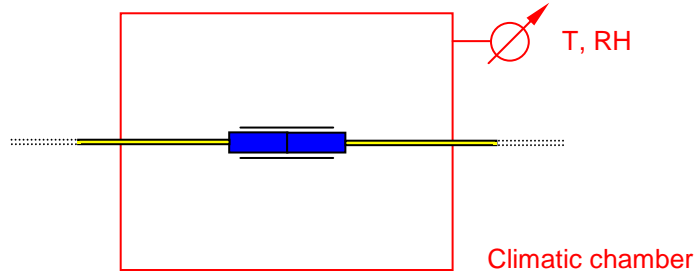

Requirements: $\Delta IL_{Max} \leq 0.20$ dB during test

- Samples:**
- DUT: 4 SM duplex cable patch cords terminated with Diamond SC APC SM duplex connectors
 - Fibre / cable type: Cable with SM 9/125 μ m fibre, Diamond art. no. -
 - Mating adapters: Diamond SC SM duplex


- Parameters:**
- Wavelengths: 1310 nm
 - Monitored channels: 8
 - Constant temperature: -40°C
 - Relative humidity: Not controlled
 - Duration: 16 h

Results:

Samples no.	Insertion loss IL[dB]		Variation of insertion loss ΔIL [dB] at 1310 nm
	before test at 1310 nm	after test at 1310 nm	
1	0.23	0.25	0.02
2	0.08	0.13	0.05
3	0.17	0.19	0.02
4	0.15	0.21	0.06
5	0.19	0.25	0.06
6	0.20	0.27	0.07
7	0.18	0.22	0.04
8	0.13	0.20	0.07
Maximum value			0.07
Minimum value			0.02

Dry heat

- Methods:**
- Insertion loss measurement method B according to IEC 61300-3-4
 - Active monitoring of attenuation according to IEC 61300-3-3
 - Dry heat test according to IEC 61300-2-18

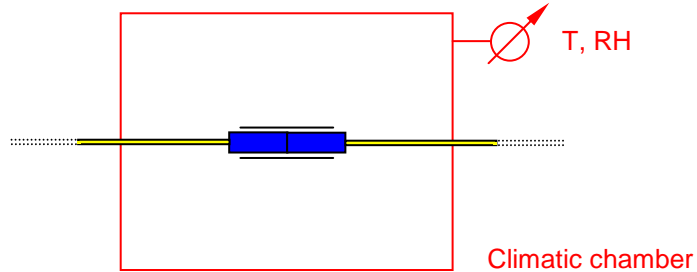

Requirements: $\Delta IL_{Max} \leq 0.20$ dB during test

- Samples:**
- DUT: 4 SM duplex cable patch cords terminated with Diamond SC APC SM duplex connectors
 - Fibre / cable type: Cable with SM 9/125 μ m fibre, Diamond art. no. -
 - Mating adapters: Diamond SC SM duplex


- Parameters:**
- Wavelengths: 1310 nm
 - Monitored channels: 8
 - Constant temperature: +85°C
 - Relative humidity: Not controlled
 - Duration: 16 h

Results:

Samples no.	Insertion loss IL[dB]		Variation of insertion loss ΔIL [dB] at 1310 nm
	before test at 1310 nm	after test at 1310 nm	
1	0.31	0.36	0.05
2	0.20	0.23	0.03
3	0.07	0.10	0.03
4	0.17	0.19	0.02
5	0.28	0.29	0.01
6	0.18	0.27	0.09
7	0.15	0.19	0.04
8	0.06	0.13	0.07
Maximum value			0.09
Minimum value			0.01

Thermal age

- Methods:**
- Insertion loss measurement method B according to IEC 61300-3-4
 - Active monitoring of attenuation according to IEC 61300-3-3
 - Thermal age test according to Telcordia GR-326-CORE

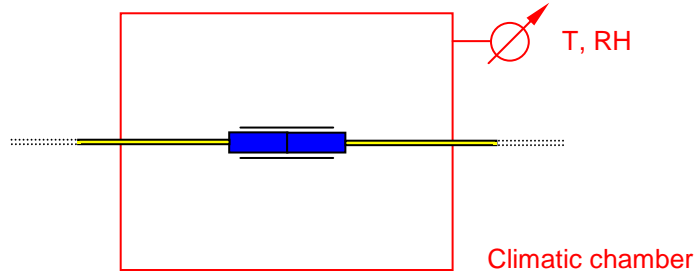

Requirements: $\Delta IL_{Max} \leq 0.20$ dB during test

- Samples:**
- DUT: 4 SM duplex cable patch cords terminated with Diamond SC APC SM duplex connectors
 - Fibre / cable type: Cable with SM 9/125 μ m fibre, Diamond art. no. -
 - Mating adapters: Diamond SC SM duplex


- Parameters:**
- Wavelengths: 1310 nm
 - Monitored channels: 8
 - Constant temperature: +85°C
 - Relative humidity: Not controlled
 - Duration: 336 h

Results:

Samples no.	Insertion loss IL[dB]		Variation of insertion loss ΔIL [dB] at 1310 nm
	before test at 1310 nm	after test at 1310 nm	
1	0.23	0.29	0.06
2	0.13	0.19	0.06
3	0.15	0.22	0.07
4	0.07	0.12	0.08
5	0.18	0.28	0.10
6	0.29	0.30	0.01
7	0.12	0.13	0.01
8	0.34	0.38	0.04
Maximum value			0.10
Minimum value			0.01

Damp heat

- Methods:**
- Insertion loss measurement method B according to IEC 61300-3-4
 - Active monitoring of attenuation according to IEC 61300-3-3
 - Damp heat test according to IEC 61300-2-19

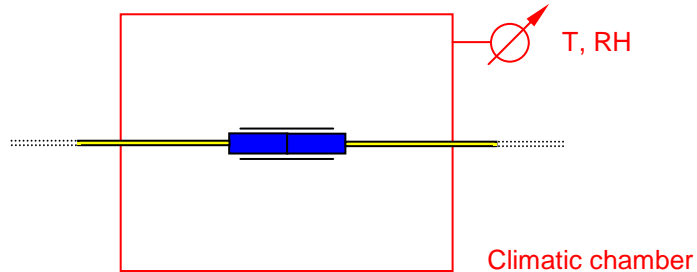

Requirements: $\Delta IL_{Max} \leq 0.20$ dB during test

- Samples:**
- DUT: 4 SM duplex cable patch cords terminated with Diamond SC APC SM duplex connectors
 - Fibre / cable type: Cable with SM 9/125 μm fibre, Diamond art. no. -
 - Mating adapters: Diamond SC SM duplex


- Parameters:**
- Wavelengths: 1310 nm
 - Monitored channels: 8
 - Constant temperature: +60°C
 - Relative humidity: 95% r.h.
 - Duration: 336 h

Results:

Samples no.	Insertion loss IL[dB]		Variation of insertion loss ΔIL [dB] at 1310 nm
	before test at 1310 nm	after test at 1310 nm	
1	0.32	0.33	0.01
2	0.20	0.27	0.07
3	0.19	0.30	0.11
4	0.08	0.13	0.05
5	0.06	0.14	0.08
6	0.09	0.13	0.04
7	0.23	0.24	0.01
8	0.19	0.23	0.04
Maximum value			0.11
Minimum value			0.01

Vibration, sinusoidal


- Methods:**
- Insertion loss measurement method B according to IEC 61300-3-4
 - Active monitoring of attenuation according to IEC 61300-3-3
 - Sinusoidal vibration test according to IEC 61300-2-1

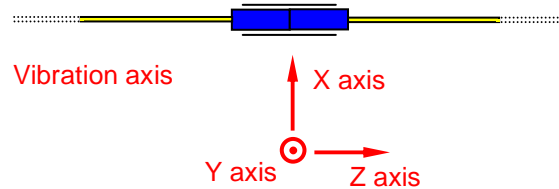

- Requirements:** $\Delta IL_{Max} \leq 0.20$ dB during test
- Samples:**
- DUT: 2 SM duplex cable patch cords terminated with Diamond SC APC SM duplex connectors
 - Fibre / cable type: Cable with SM 9/125 μ m fibre, Diamond art. no. -
 - Mating adapters: Diamond SC SM duplex
- Parameters:**
- Wavelengths: 1310 nm
 - Monitored channels: 2
 - Upper vibration frequency: 60 Hz
 - Lower vibration frequency: 10 Hz
 - Vibration amplitude: 0.75 mm (peak-to-peak)
 - Sweep rate: 1 Oct/min
 - Sweep cycles: 4
 - Duration per axis: 30 min
- Results:** Variation of insertion loss during the test < 0.10 dB

Tensile strength of coupling mechanism

- Methods:**
- Insertion loss measurement method B according to IEC 61300-3-4
 - Active monitoring of attenuation according to IEC 61300-3-3
 - Tensile strength of coupling mechanism test according to IEC 61300-2-6

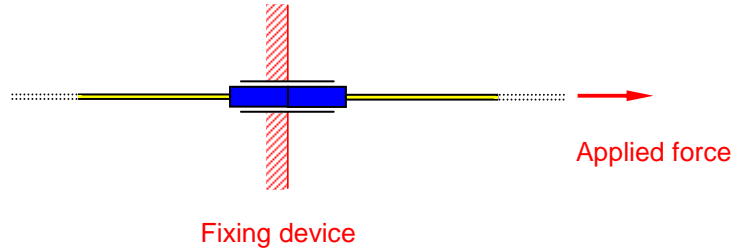

Requirements: $\Delta IL_{Max} \leq 0.20$ dB during test

- Samples:**
- DUT: 4 SM duplex cable patch cords terminated with Diamond SC APC SM duplex connectors
 - Fibre / cable type: Cable with SM 9/125 μ m fibre, Diamond art. no. -
 - Mating adapters: Diamond SC SM duplex


- Parameters:**
- Wavelengths: 1310 nm
 - Monitored channels: 8
 - Applied force: 70 N
 - Force direction: Longitudinal connector axis
 - Duration of applied force: 1 min
 - Force application distance: 30 cm

Results:

Samples no.	Insertion loss IL[dB]			Variation of insertion loss ΔIL [dB] at 1310 nm
	before test at 1310 nm	during test at 1310 nm	after test at 1310 nm	
1	0.18	0.19	0.18	0.01
2	0.09	0.09	0.09	0.00
3	0.15	0.17	0.16	0.02
4	0.06	0.08	0.07	0.02
5	0.11	0.12	0.12	0.01
6	0.10	0.12	0.11	0.02
7	0.28	0.30	0.29	0.02
8	0.17	0.18	0.18	0.01
Maximum value				0.02
Minimum value				0.00

Cable torsion

- Methods:**
- Insertion loss measurement method B according to IEC 61300-3-4
 - Active monitoring of attenuation according to IEC 61300-3-3
 - Cable torsion test according to IEC 61300-2-5

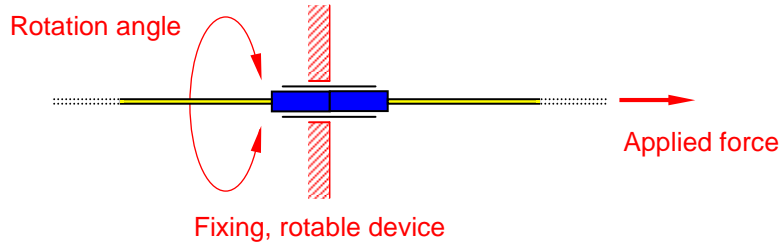

Requirements: $\Delta IL_{Max} \leq 0.20$ dB during test

- Samples:**
- DUT: 2 SM duplex cable patch cords terminated with Diamond SC APC SM duplex connectors
 - Fibre / cable type: Cable with SM 9/125 μ m fibre, Diamond art. no. -
 - Mating adapters: Diamond SC SM duplex


- Parameters:**
- Wavelengths: 1310 nm
 - Monitored channels: 4
 - Applied force: 15 N
 - Force direction: Longitudinal connector axis
 - Rotation angle: $+180^\circ$ to -180° and back
 - Number of cycles: 25
 - Force application distance: 30 cm

Results:

Samples no.	Insertion loss IL[dB]			Variation of insertion loss ΔIL [dB] at 1310 nm
	before test at 1310 nm	during test at 1310 nm	after test at 1310 nm	
1	0.24	0.29	0.23	0.06
2	0.18	0.23	0.19	0.05
3	0.20	0.23	0.21	0.03
4	0.08	0.10	0.08	0.02
Maximum value				0.06
Minimum value				0.02

Impact

- Methods:**
- Insertion loss measurement method B according to IEC 61300-3-4
 - Impact test method A according to IEC 61300-2-12

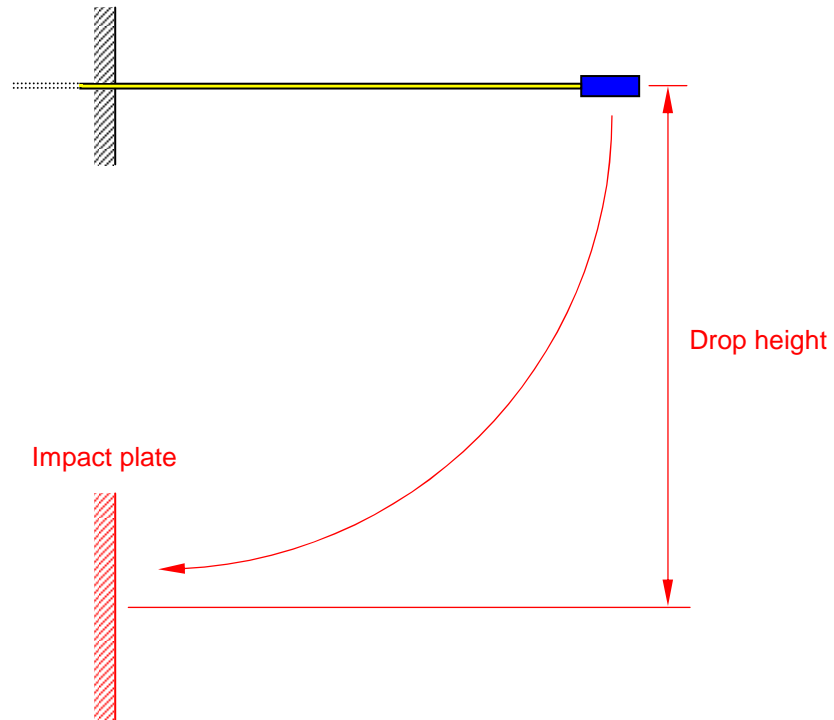

Requirements: $\Delta IL_{Max} \leq 0.20$ dB before/after test

Samples:

- DUT: 4 SM duplex cable patch cords terminated with Diamond SC APC SM duplex connectors
- Fibre / cable type: Cable with SM 9/125 μ m fibre, Diamond art. no. -
- Mating adapters: Diamond SC SM duplex

Parameters:

- Wavelengths: 1310 nm
- Drop height: 1.5 m
- Number of drops: 5

Results:

Samples no.	Insertion loss IL[dB]		Variation of insertion loss ΔIL [dB] at 1310 nm
	before test at 1310 nm	after test at 1310 nm	
1	0.34	0.35	0.01
2	0.12	0.14	0.02
3	0.16	0.21	0.05
4	0.25	0.28	0.03
5	0.26	0.30	0.04
6	0.06	0.12	0.06
7	0.10	0.18	0.08
8	0.08	0.14	0.06
Maximum value			0.08
Minimum value			0.01